

Powerful Performance Meets Energy Efficiency



**HOT**

**CLEAN**

**GREEN**

## The World's Cleanest, Greenest Direct-Contact Water Heating System Is Still The Original

The original QuikWater® direct-contact water heating system has changed the way industries heat water for use in industrial applications—and our customers couldn't be happier. That's because QuikWater's flagship and twin tower models deliver pure, potable, hot water on demand with 99% energy efficiency, cutting your monthly energy cost virtually in half, and helping your business operate eco-friendly.

- 99% energy efficient, up to 40% energy savings
- Environmentally safe
- 1-2 year ROI compared with boilers or indirect-contact water heating systems
- 9 gpm to 2300 gpm of pure, potable water
- 600,000 btu/hr to 70 mmbtu/hr with temperatures up to 180°F
- Patented clean burn technology
- Non-pressurized design eliminates safety risks
- Runs on natural gas, propane, or No. 2 fuel oil for non-potable water applications
- Integral storage tank with manway
- Easy maintenance with integrated clean-in-place system
- Pre-piped, pre-wired, factory tested
- Low NOx, ultra-low NOx and NSF systems available



QuikWater direct-contact water heating systems are the smart choice for concrete production, commercial laundries, and the glass, textiles, car washing, food processing, government and aviation industries.

# Hot. Clean. Green. That's the QuikWater advantage.

QuikWater Heater Capacities																
Temp Rise	GPM per Heater Model															
	600	1000	1750	2500	3500	5000	6000	8000	10.0	12.5	15.0	17.5	20.0	25.0	30.0	35.0
60	20	33	58	83	117	167	200	267	333	417	500	583	667	833	1000	1167
70	17	29	50	71	100	143	171	229	286	357	429	500	571	714	857	1000
80	15	25	44	63	88	125	150	200	250	313	375	438	500	625	750	875
90	13	22	39	56	78	111	133	178	222	278	333	389	444	556	667	778
100	12	20	35	50	70	100	120	160	200	250	300	350	400	500	600	700
110	11	18	32	45	64	91	109	145	182	227	273	318	364	455	545	636
120	10	17	29	42	58	83	100	133	167	208	250	292	333	417	500	583
130	9	15	27	38	54	77	92	123	154	192	231	269	308	385	462	538
DIM "A" – Length	64"	83"	86"	102"	125"	158"	174"	188"	197"	213"	248"	282"	260"	270"	285"	305"
DIM "B" – Width	35"	37"	43"	46"	54"	54"	60"	72"	72"	73"	80"	96"	102"	102"	108"	112"
DIM "C" – Height	101"	110"	111"	123"	138"	148"	156"	162"	174"	174"	176"	180"	200"	200"	200"	200"
Exhaust stack diam.	8"	10"	12"	18"	18"	22"	24"	28"	34"	36"	38"	40"	44"	48"	50"	52"



QuikWater® can be set for a range of BTU needs.

### Heater Calculations:

$$\text{Temp Rise} \times \text{GPM} \times 500 = \text{BTU Required}$$

$$\text{Temp Rise} = \text{Hot Water Temp} - \text{Cold Water Temp}$$

(If temperature rise is less than 50 please consult the factory.)

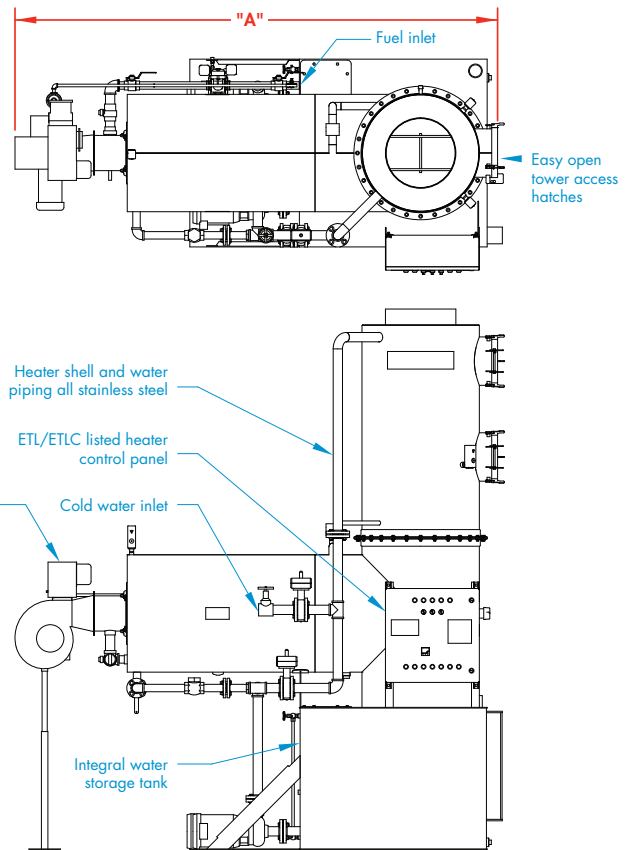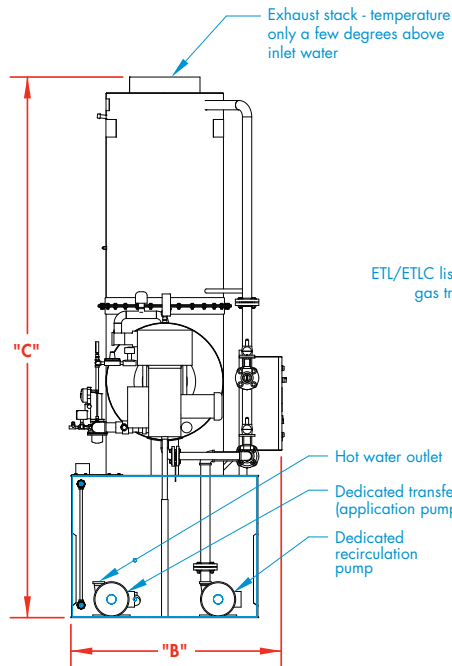

There's no better time to put QuikWater direct-contact water heating systems to work in your business. Call us today at 918.241.8880 and learn why we are the Number One brand for hot, clean, green water-heating technology.



**918-241-8880**

fax: 918-241-8718 | sales@quikwater.com  
8939 West 21st Street | Sand Springs, OK 74063

[www.quikwater.com](http://www.quikwater.com)